

- ▶ ON delay
- ▶ 1 Time range
- ▶ 1 Supply voltage
- ▶ 1 change-over contact
- ▶ Width 22.5 mm
- ▶ Industrial design



Technical data

1. Functions

E ON delay

2. Time ranges

s. table

3. Indicators

Green LED ON: indication of supply voltage
Yellow LED ON/OFF: indication of relay output

4. Mechanical design

Self-extinguishing plastic housing, IP rating IP40
Mounted on DIN-Rail TS 35 according to EN 50022
Mounting position: any
Shockproof terminal connection according to VBG 4 (PZ1 required), IP rating IP20
Initial torque: max. 1Nm
Terminal capacity:
1 x 0.5 to 2.5mm² with/without multicore cable end
2 x 0.5 to 1.5mm² with/without multicore cable end
2 x 1.5mm² flexible without multicore cable end

5. Input circuit

Supply voltages (availability see table):
24V AC/DC terminals A1(+)-A2 (P6SE 24VAC/DC)
42V AC/DC terminals A1(+)-A2 (P6SE 42VAC/DC)
48V AC/DC terminals A1(+)-A2 (P6SE 48VAC/DC)
110V AC terminals A1-A2 (P6SE 110VAC)
230V AC terminals A1-A2 (P6SE 230VAC)

Tolerance:
24V DC ±10% (P6SE 24VAC/DC)
24V AC -15% to+10%
42V DC ±10% (P6SE 42VAC/DC)
42V AC -15% to+10%
48V DC ±10% (P6SE 48VAC/DC)
48V AC -15% to+10%
110V AC -15% to+10% (P6SE 110VAC)
230V AC -15% to+10% (P6SE 230VAC)

Rated frequency: 48 to 63Hz

Rated consumption:
24V AC/DC 1VA (0.6W) (P6SE 24VAC/DC)
42V AC/DC 1,5VA (1W) (P6SE 42VAC/DC)
48V AC/DC 1,7VA (1,2W) (P6SE 48VAC/DC)
110V AC 4VA (1.3W) (P6SE 110VAC)
230V AC 8VA (1.3W) (P6SE 230VAC)

Duration of operation: 100%
Reset time: 100ms
Residual ripple for DC: 10%
Drop-out voltage: >20% of the supply voltage

6. Output circuit

1 potential free change-over contact
Switching capacity (distance < 5mm): 750VA (3A/250V AC)
Switching capacity (distance > 5mm):[^] 1250VA (5A/250V AC)
Fusing: 6A fast acting

Mechanical life: 10 x 10⁶ operations
Electrical life: 1 x 10⁵ operations at 1000VA resistive load
Switching frequency: max. 60/min at 100VA resistive load
max. 6/min at 1000VA resistive load (according to IEC 947-5-1)
Insulation voltage: 250V AC (according to IEC 664-1)
Surge voltage: 4kV, overvoltage category III (according to IEC 664-1)

7. Accuracy

Base accuracy: ±5% (of maximum scale value)
Adjustment accuracy: ≤5% (of maximum scale value)
Repetition accuracy: <1%
Voltage influence: -
Temperature influence: ≤0.1%/°C

8. Ambient conditions

Ambient temperature: -25 to+55°C (according to IEC 8-1)
-25 to+40°C (according to UL 508)
Storage temperature: -25 to+70°C
Transport temperature: -25 to+70°C
Relative humidity: 15% to 85% (according to IEC 721-3-3 class 3K3)
Pollution degree: 3 (according to IEC 664-1)

9. Types

		Time ranges							
		1s	3s	10s	30s	1min	10min	30min	1h
Supply voltages	24V AC/DC			X			X		
	42V AC/DC								
	48V AC/DC							X	
	110V AC			X					
	230V AC	X		X		X	X		X

All marked types are standard types.
Not marked types only on request (Minimum quantity for an order).
type code:
P6SE + "supply voltage" + "time range" (e.g.. P6SE 230VAC 10s)


► Functions

ON delay (E)

When the supply voltage U is applied, the set interval t begins (green LED flashing). After the interval t has expired (green LED illuminated) the output relay R switches into on-position (yellow LED illuminated). This status remains until the supply voltage is interrupted. If the supply voltage is interrupted before the expiry of the interval t , the interval already expired is erased and is restarted when the supply voltage is next applied.



► Connections

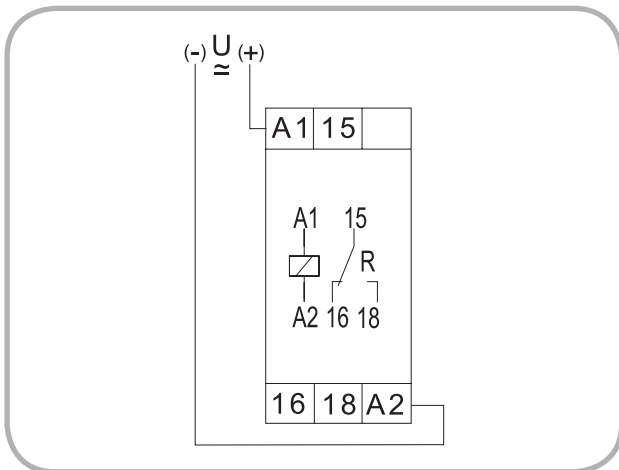

► Dimensions

